


These guys don't take no for an answer!



Closed & Open

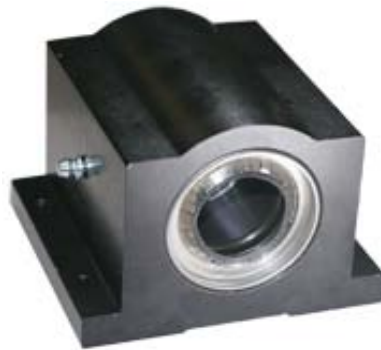

Single, Closed Pillow Blocks



Single, Open Pillow Blocks



Closed & Open Twin Pillow Blocks



Flange Blocks



Thin Wall Bearings

A little lubrication and they're on their way - if you know what I mean...

Simultaneous linear, oscillating and rotary motion in 1 bearing

High Load Capacity - 10x's more than comparable linear ball bearing

Lowest coefficient of friction of any linear ball bearing replacement

Works where others fail: glass, granite, chemicals, heat & shock!

Quiet running Very competitively priced against all ball bushing products

Available in all standard inch & metric linear ball bearing size

Ceramic Coating does not chip, flake or crack upon impact, shock or vibration
FDA/USDA Compliant



1-800-513-3163

www.LM76.com

If you lubricate, there is no equal in performance or price!



BLACK RACER, CERAMIC COATED LINEAR BEARINGS™

The “original” drop-in replacement for linear ball bushings, our Ceramic Coated bearing is simply awesome in applications where traditional linear ball bushings fail. Ceramic Coated bearings require lubrication - either a grease or light oil. They excel in “Hellish” environments, operate with a low Coefficient of friction (.04 - .08) and outlast any comparable product: .00004” wear after 100 million linear FEET!

OVER 100 G's Acceleration!

To date, we are not aware of any application where Black Racer Ceramic Coated Bearings™ have failed due to Acceleration or system speed when properly employed. **We have seen accelerations over 100G's!**



LM76

LM76 Linear Motion Bearings
140 Industrial Drive
East Longmeadow, Massachusetts 01028
1-800-513-3163
www.LM76.com